


KULEFLOORING®

KPS SERIES DATASHEET 2 0 2 5



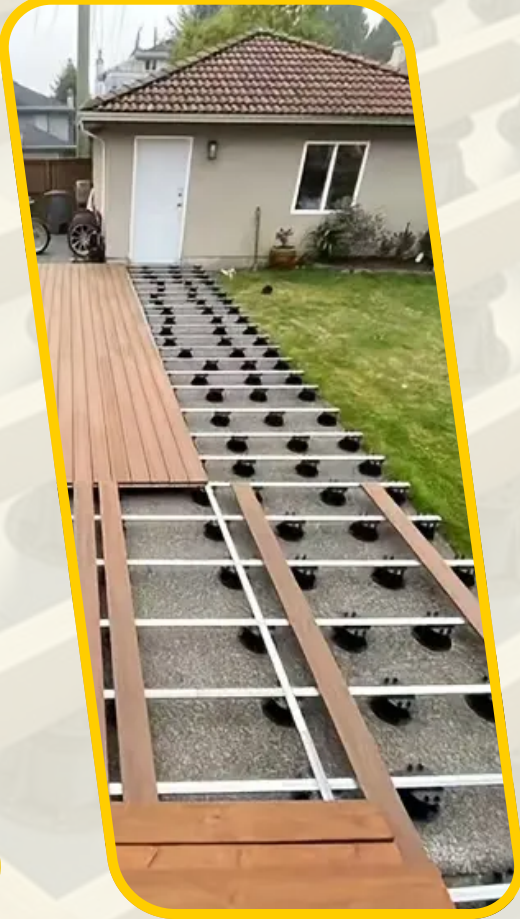

PRODUCT DESCRIPTION

The KPS Pedestal Series features a practical design offering a permanent solution. It includes a wide range of accessories, fixed joints, and supports adjustable in both height and angle.



ADVANTAGES

- Adjustable between 21mm and 202mm
- High stability thanks to wide pedestal top
- Can be used up to 7°.
- High load resistance
- Thermal and acoustic insulation




FIELDS OF APPLICATION

- Aluminum Profiles
- Ceramic Floors
- Wooden Floors
- WPC Composite Floors
- Natural Stone Floors
- Terrazzo Floors

MATERIAL


PP (Polypropylene) (15% TALC)

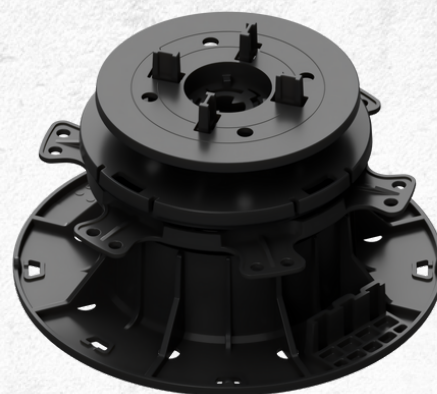

KPS 40-64-D3




KPS 40-64-P3

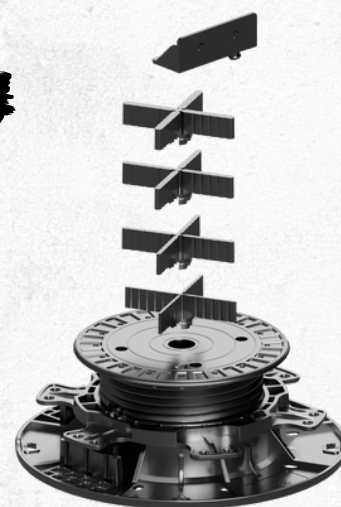

PRODUCT TABLE

Product Code	Explanation	Usage Height (mm)	Adjustable Range (mm)
KPS 21-27	21mm to 27mm adjustable pedestal with interchangeable joints (SX,DX,CW3,PSX,PX)	21-27	6
KPS 27-40	27mm to 40mm adjustable pedestal with interchangeable joints (SX,DX,CW3,PSX,PX)	27-40	13
KPS 40-64	40mm to 64mm adjustable pedestal with interchangeable joints (SX,DX,CW3,PSX,PX)	40-64	24
KPS 64-110	64mm to 110m adjustable pedestal with interchangeable joints (SX,DX,CW3,PSX,PX)	64-110	46
KPS 110-202	110mm to 202mm adjustable pedestal with interchangeable joints (SX,DX,CW3,PSX,PX)	110-202	92

TECHNICAL INFO

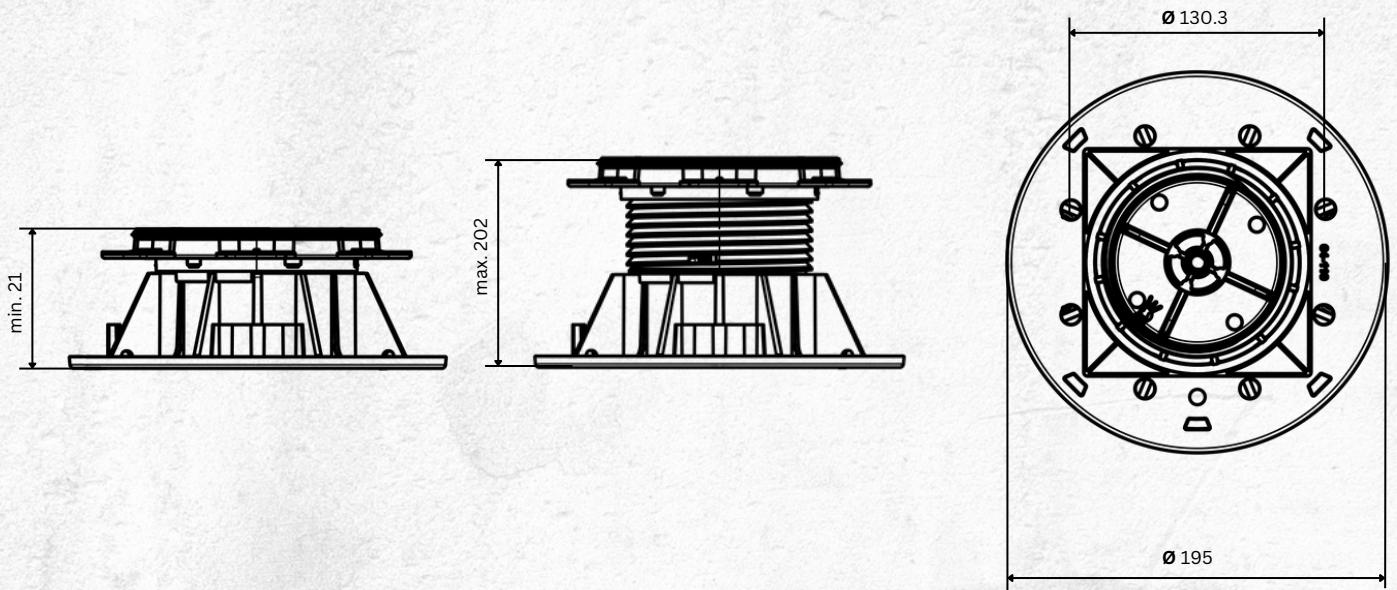

INTEROPERABLE PRODUCTS

Product Code	Explanation	Material	Qty Per Pack
KA EX - 100	Riser series products designed to adjust the height of pedestals. Compatible with KP and KPS Series pedestals. Standard height is 100mm.	PP	24
KPS XX- SX	Interchangeable spacer with fixed joint thickness (S:2,3,4,5mm) for general use.	PP	42-66-96
KPS XX- CW3	Replaceable, 3mm thick spacer for use in profiles.	PP	42-66-96
KPS XX- PSXX	Interchangeable spacer for use in profiles, suitable for profile thickness (PS40, PS50).	PP	200
KPS XX- DX	Interchangeable, 7° adjustable, fixed joint (D:2,3,4,5mm) thickness spacer for general use.	PP	200
KPS XX- P40	Interchangeable, 7° adjustable spacer for use on profiles, suitable for 40 mm profile thickness.	PP	200


LOAD CAPACITY (MAX)

Product Code	Loose	Tightened
KP 21-27-XX	1128 kg	9000 kg
KP 27-40-XX	1063 kg	6000 kg
KP 40-64-XX	922 kg	4472 kg
KP 64-110-XX	1180 kg	4320 kg
KP 110-202-XX	931 kg	4120 kg


SUPPORT FOR STONE PAVEMENTS

Using the appropriate adjustable pedestals is crucial when constructing a raised stone floor on surfaces without a sub-foundation. Kule pedestals deliver the required support and stability, ensuring the stone floor is securely anchored. The type and quantity of pedestals needed vary depending on the size of the slabs. The examples below demonstrate solutions for different scenarios and can be used as a reference for similar applications. Consider these guidelines when planning your project for optimal results.


60 x 60 cm




80 x 80 cm

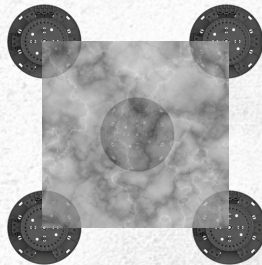


120 x 120 cm

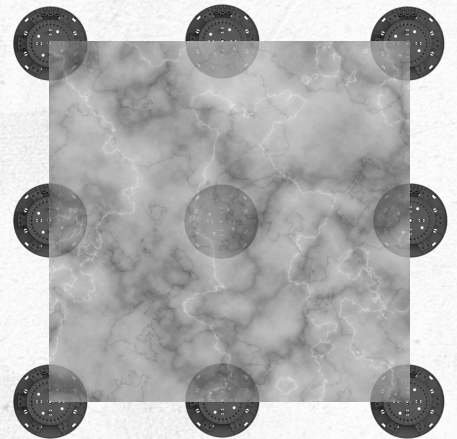

90 x 90 cm

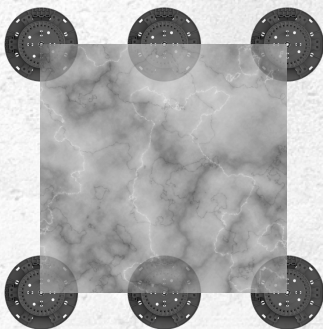

80 x 90 cm

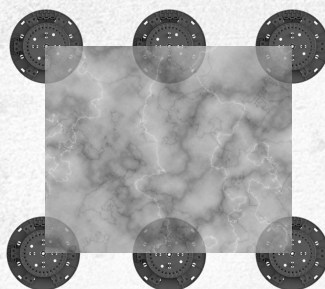


120 x 60 cm



60 x 90 cm



120 x 40 cm

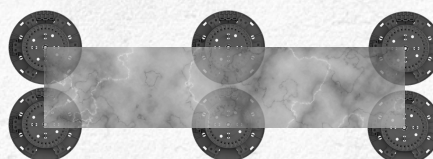

KULEFLOORING®



İnönü, Nursultan Nazarbayev Sk. No:16/1.,
41400 Gebze Güzeller OSB/
Gebze/Kocaeli / TURKIYE

+90 (262) 644 89 40

info@kuleflooring.com

WWW.KULEFLOORING.COM